



RS-S2TJ USB 2.0/eSATA/1394b

- 支援兩顆2.5吋 SATA硬碟
- 透過USB 2.0, eSATA, FireWire 800傳輸資料
- 提供 JBOD (None RAID), RAID 0 (Striping), RAID 1 (Mirroring), 以及Span
- 使用 RAID MASTER (圖形使用介面) 操作
- 透過 RAID MASTER 或是 LED 燈監控操作狀況
- 使用FireWire800不需要外接電源線
- 贈送保護套, 方便帶著走


目前專為2.5吋硬碟設計的陣列機不多, 弘拓電子開發了 DataTale PAIR磁碟陣列, 可以將兩顆硬碟整合, 分開來使用您的儲存容量, 外型小巧, 方便攜帶。

透過RAID MASTER這個圖形使用介面, 讓您操作RAID方便容易, 只要在您的MAC或PC, 將RAID MASTER安裝, 並在裡面設定RAID組, 一切都搞定!

可設定JBOD (Non RAID), RAID 0 (Striping), RAID 1 (Mirroring), 以及Span.



使用圖形介面操作RAID

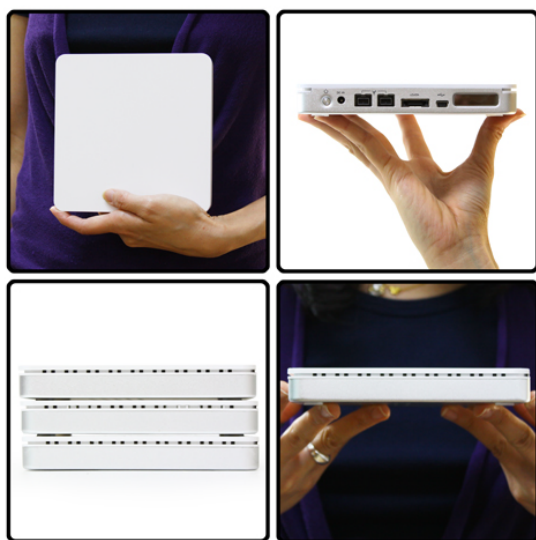

- JBOD - 個別單顆硬碟做使用,
- RAID 0 - 需要將兩顆硬碟合併成一個容量, 速度加快,
- Span - 兩顆硬碟合併成一個最大容量,
- RAID 1 - 想要資料隨時有備份區。

無論9.5mm厚度的硬碟, 或是比較厚的12.5mm, 都可容納。儲存總容量可以支援到最大約4TB*。也就是現今最大容量的2TB硬碟都可使用。

*支援到2TB以上也需要您的系統配合。請先瞭解您使用的系統有支援到2TB以上的容量, 詳情請參考我們的企網<http://www.onnto.com>的Support專區。

為了方便攜帶外出, DataTale PAIR透過FireWire 800不需要使用外接電源線, 單純使用FireWire 800傳輸即可支援電力使用。

包裝隨機贈

送黑色保護套, 保護套還附有夾層, 可放傳輸線。讓您毫無負擔地“帶著走”!

產品規格

型號	RS-S2TJ	
支援硬碟	2.5吋9.5 mm或是12.5 mm厚度的SATA硬碟	
使用介面	eSATA x 1, USB 2.0 x 1, 1394b x 2	
RAID 組	JBOD (None RAID), RAID 0 (Striping), RAID 1 (Mirroring), Span	
電源	FireWire 800 bus power, 或是外接電源 (輸入: AC 100~240V; 輸出: DC +5V/2A)	
尺寸	155 (長) x 155 (寬) x 22.5 (高) mm	
重量	260克	

Specifications are subjected to change without notice

Suitable for anyone on the road



Slip Bag is a bundled item.



系統需求

PC: 266MHz or faster CPU
64MB of RAM
Microsoft Windows 2000, XP, 2003, Vista, 7 or higher
MAC: PowerPC or Intel Processor
64MB of RAM
Mac OS X 10.4 or higher (Intel)
One available USB 2.0, eSATA, or 1394b port

